
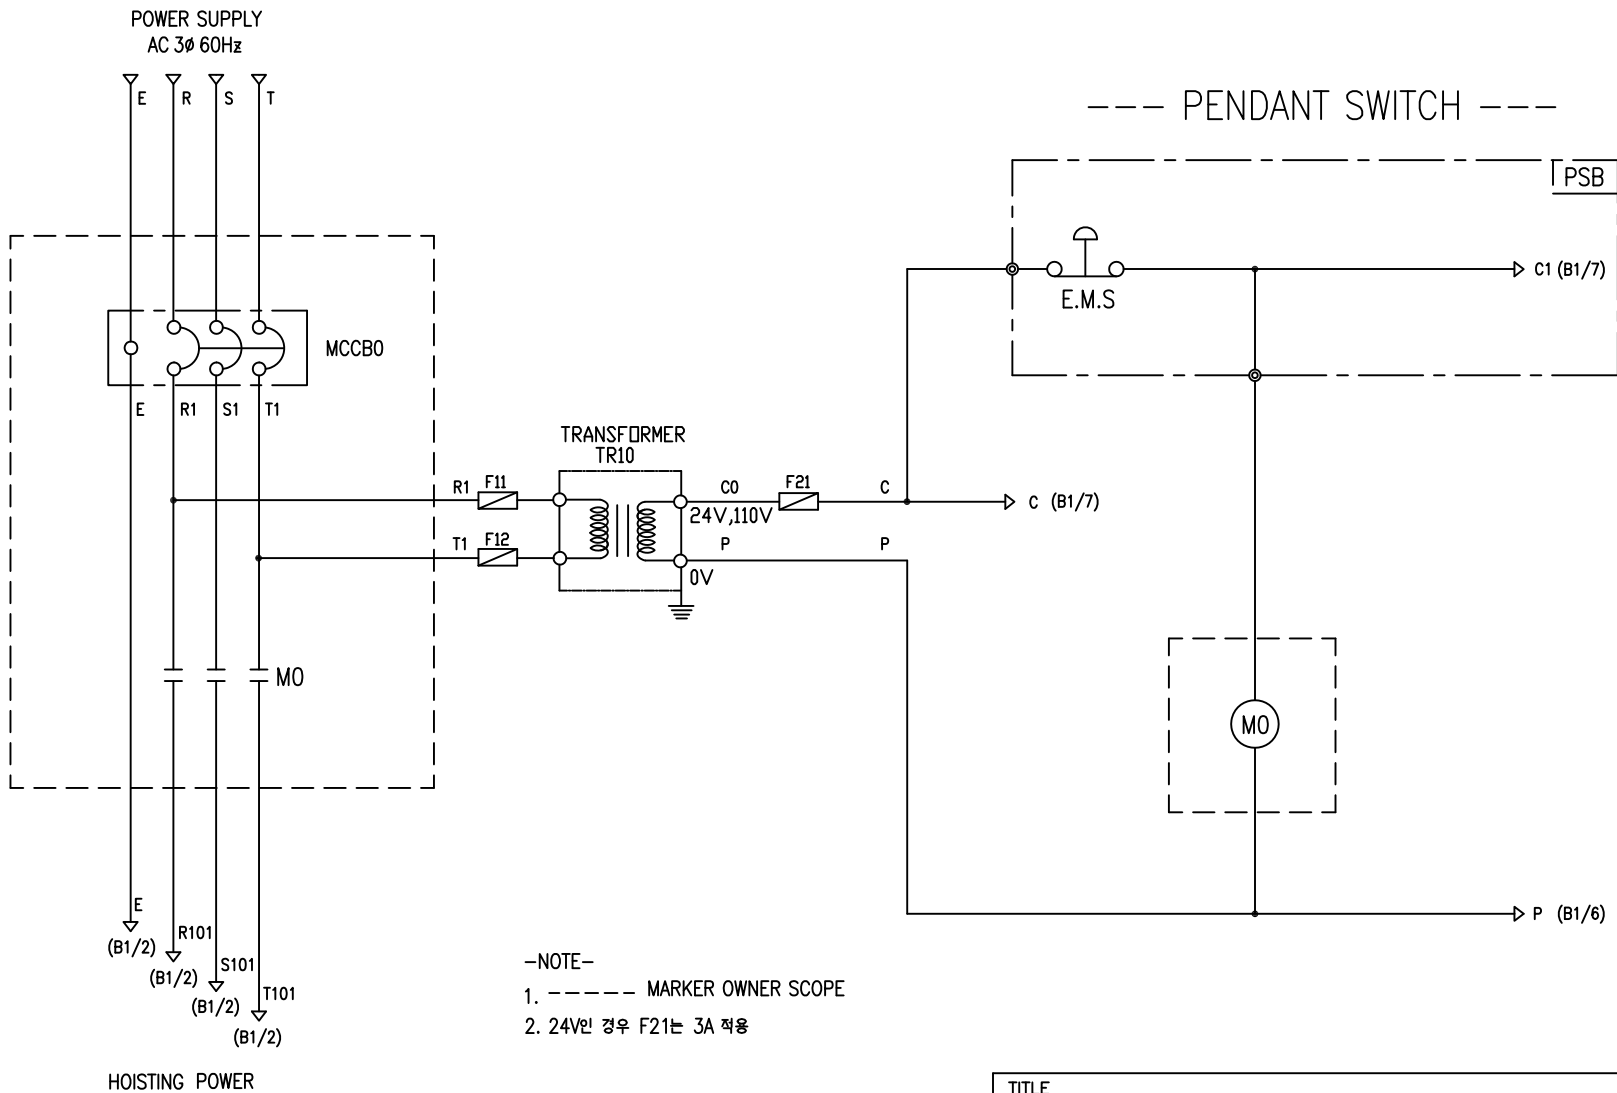


1	2	3	4	5	6	7	8	9	10		
POWER CIRCUIT					CONTROL CIRCUIT					ADDRESS NO.	A1



SPECIFICATION	NO FUSE BREAKER		MAGNET CONTACT		TRANSFORMER	FUSE
SYMBOLS	MCCB0		M0		TR10	F11, F12, F21
DESCRIPTION	220V	40A	GMC22	DMC22	60VA	1A
	380V	30A				
	440V	30A				
	460V	30A				
	480V	20A				
MAKER	LS		LS	DONGA	LK	—

TITLE					PROJECTION	
MAIN POWER & CONTROL CIRCUIT DIAGRAM						
WORK	NO	WORK NAME			SCALE	Q' TY
601		DB			1/1	1
		220V, 380V, 440V, 460V, 480V				
DRAWN	CHECKED	REVIEWED	APPROVED	MODEL	DB	
LEE.G.H				CODE NO		
2010.07.30						
 L K HOIST CO., LTD.						

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	HOISTING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	4.4/2.2 - 2/6 - 44	
4. RATED POWER	4.4/2.2 KW × 2/6 P	
5. RATED VOLTAGE AND FREQUENCY	440 V 60HZ	
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	30 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	80℃	
11. FULL LOAD SPEED	3440/1140 RPM	
12. FULL LOAD CURRENT	11.2/5.6 A	
13. STARTING CURRENT AT RATED VOLTAGE	54.9/28.6 A	
14. MINIMUM STARTING VOLTAGE	396 V	
15. EFFICIENCY AT 100% RATED LOAD	73/73 %	
16. POWER FACTOR AT 100% RATED LOAD	71/71 %	
17. STARTING TORQUE	243 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6205DD OPL : 6008ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	