




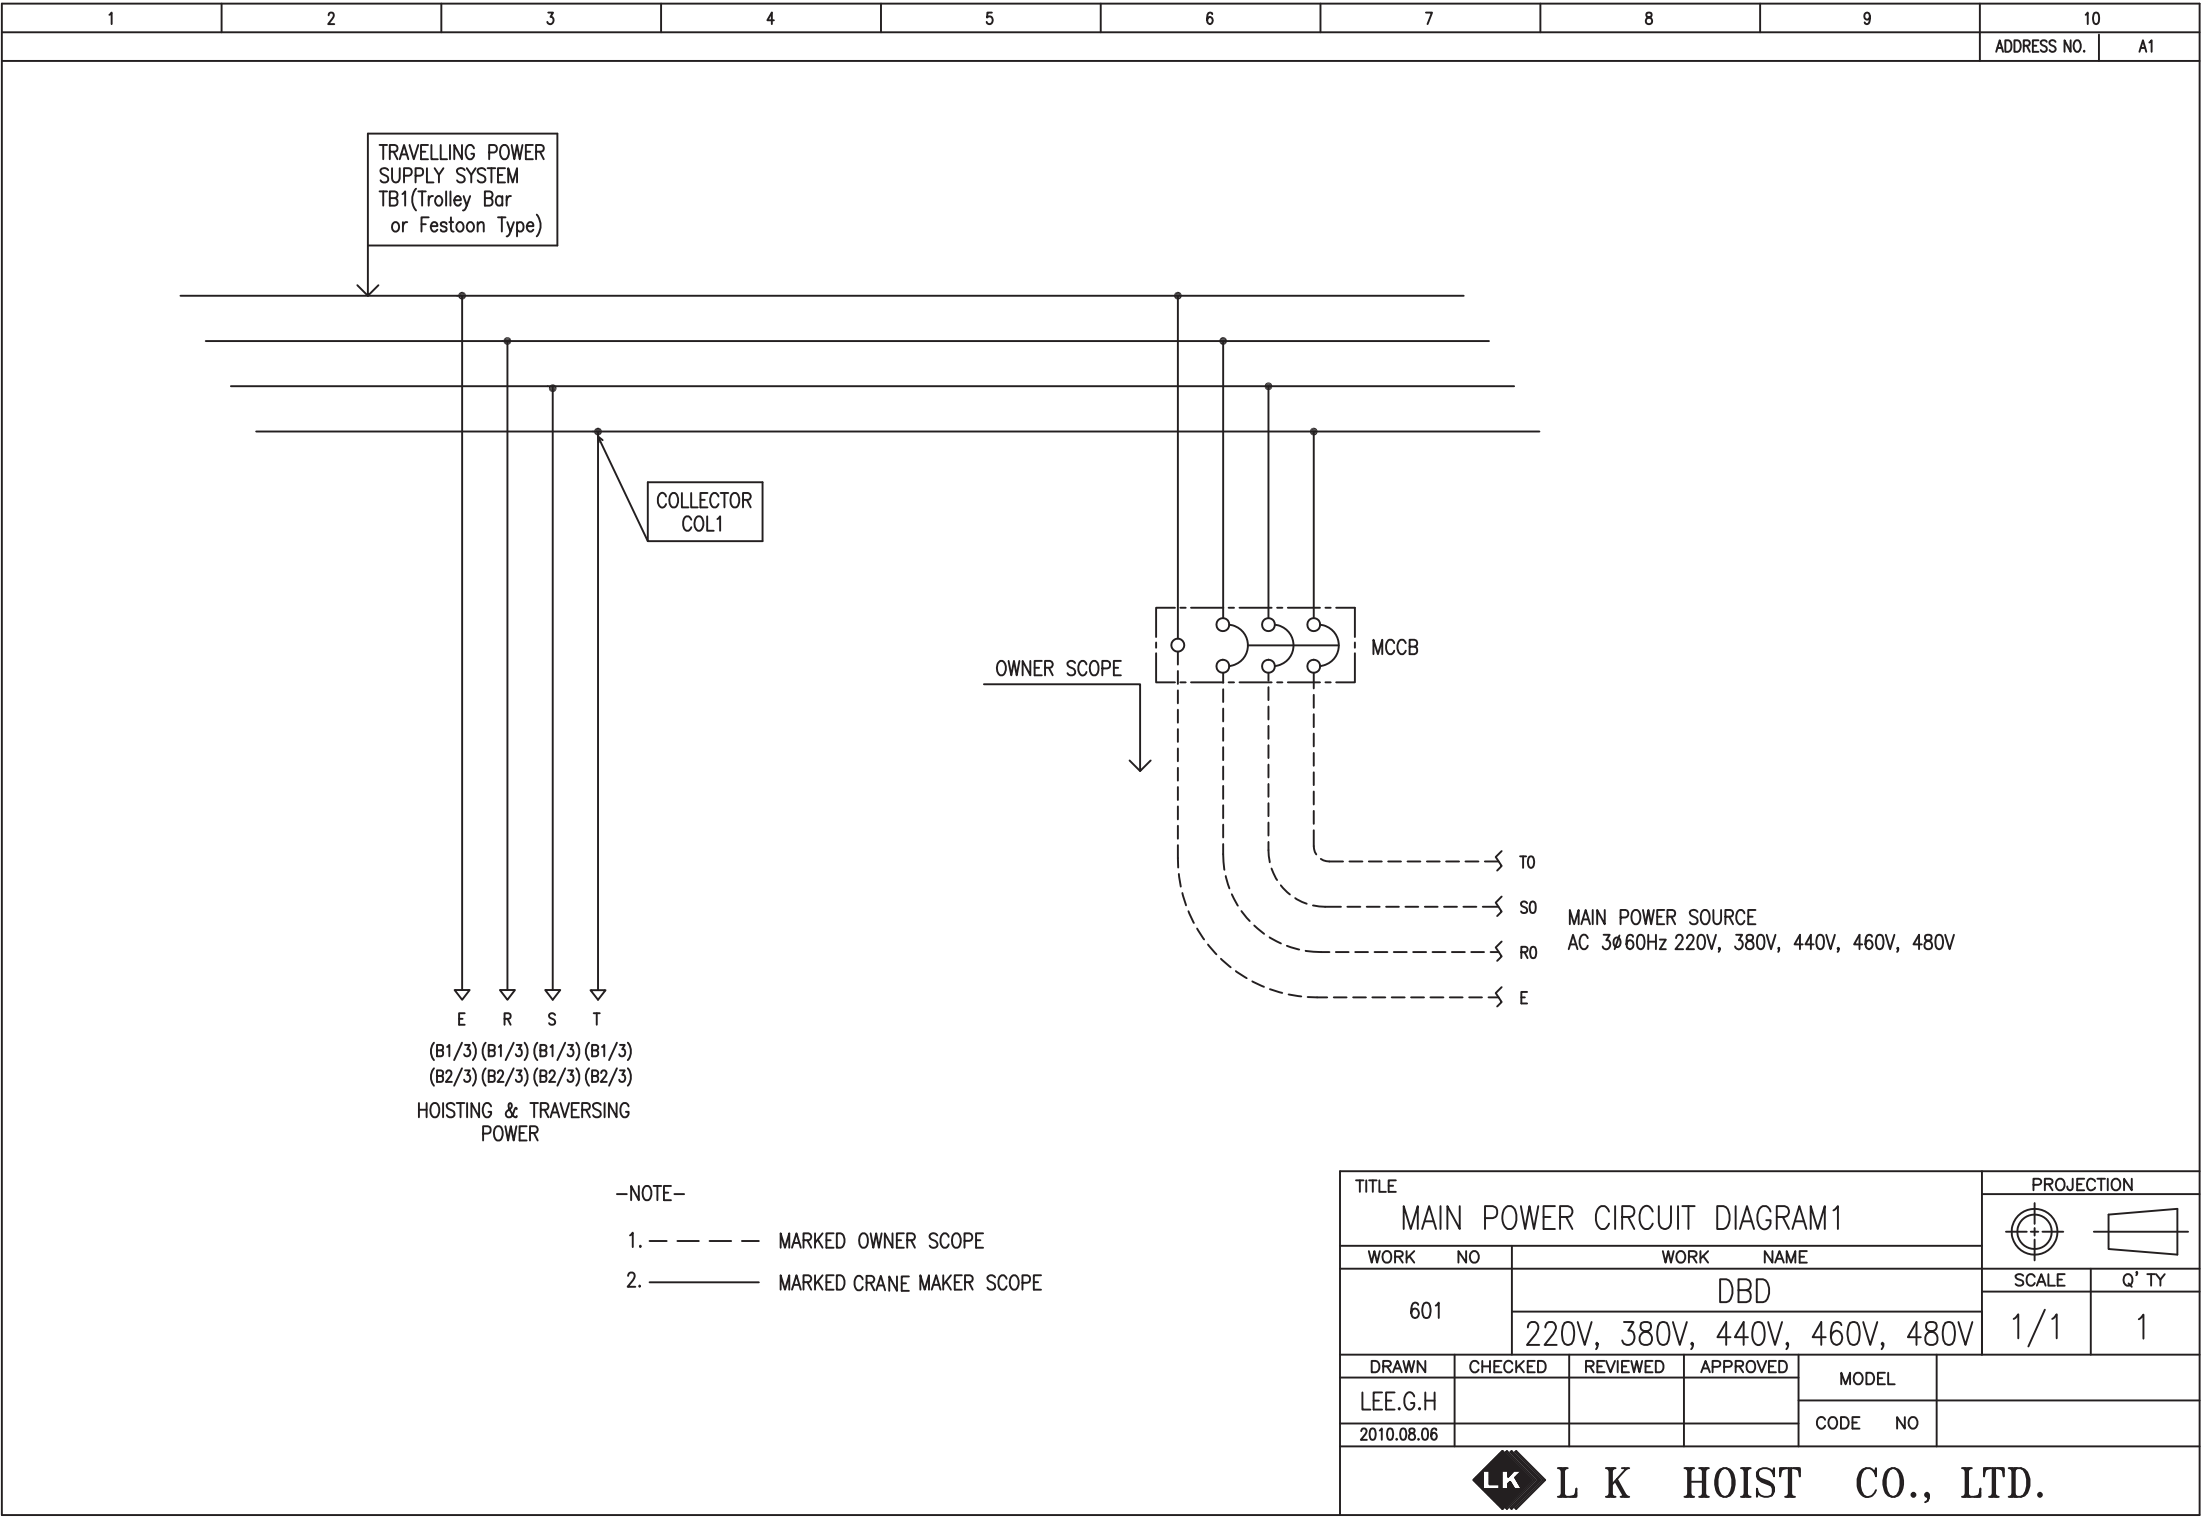

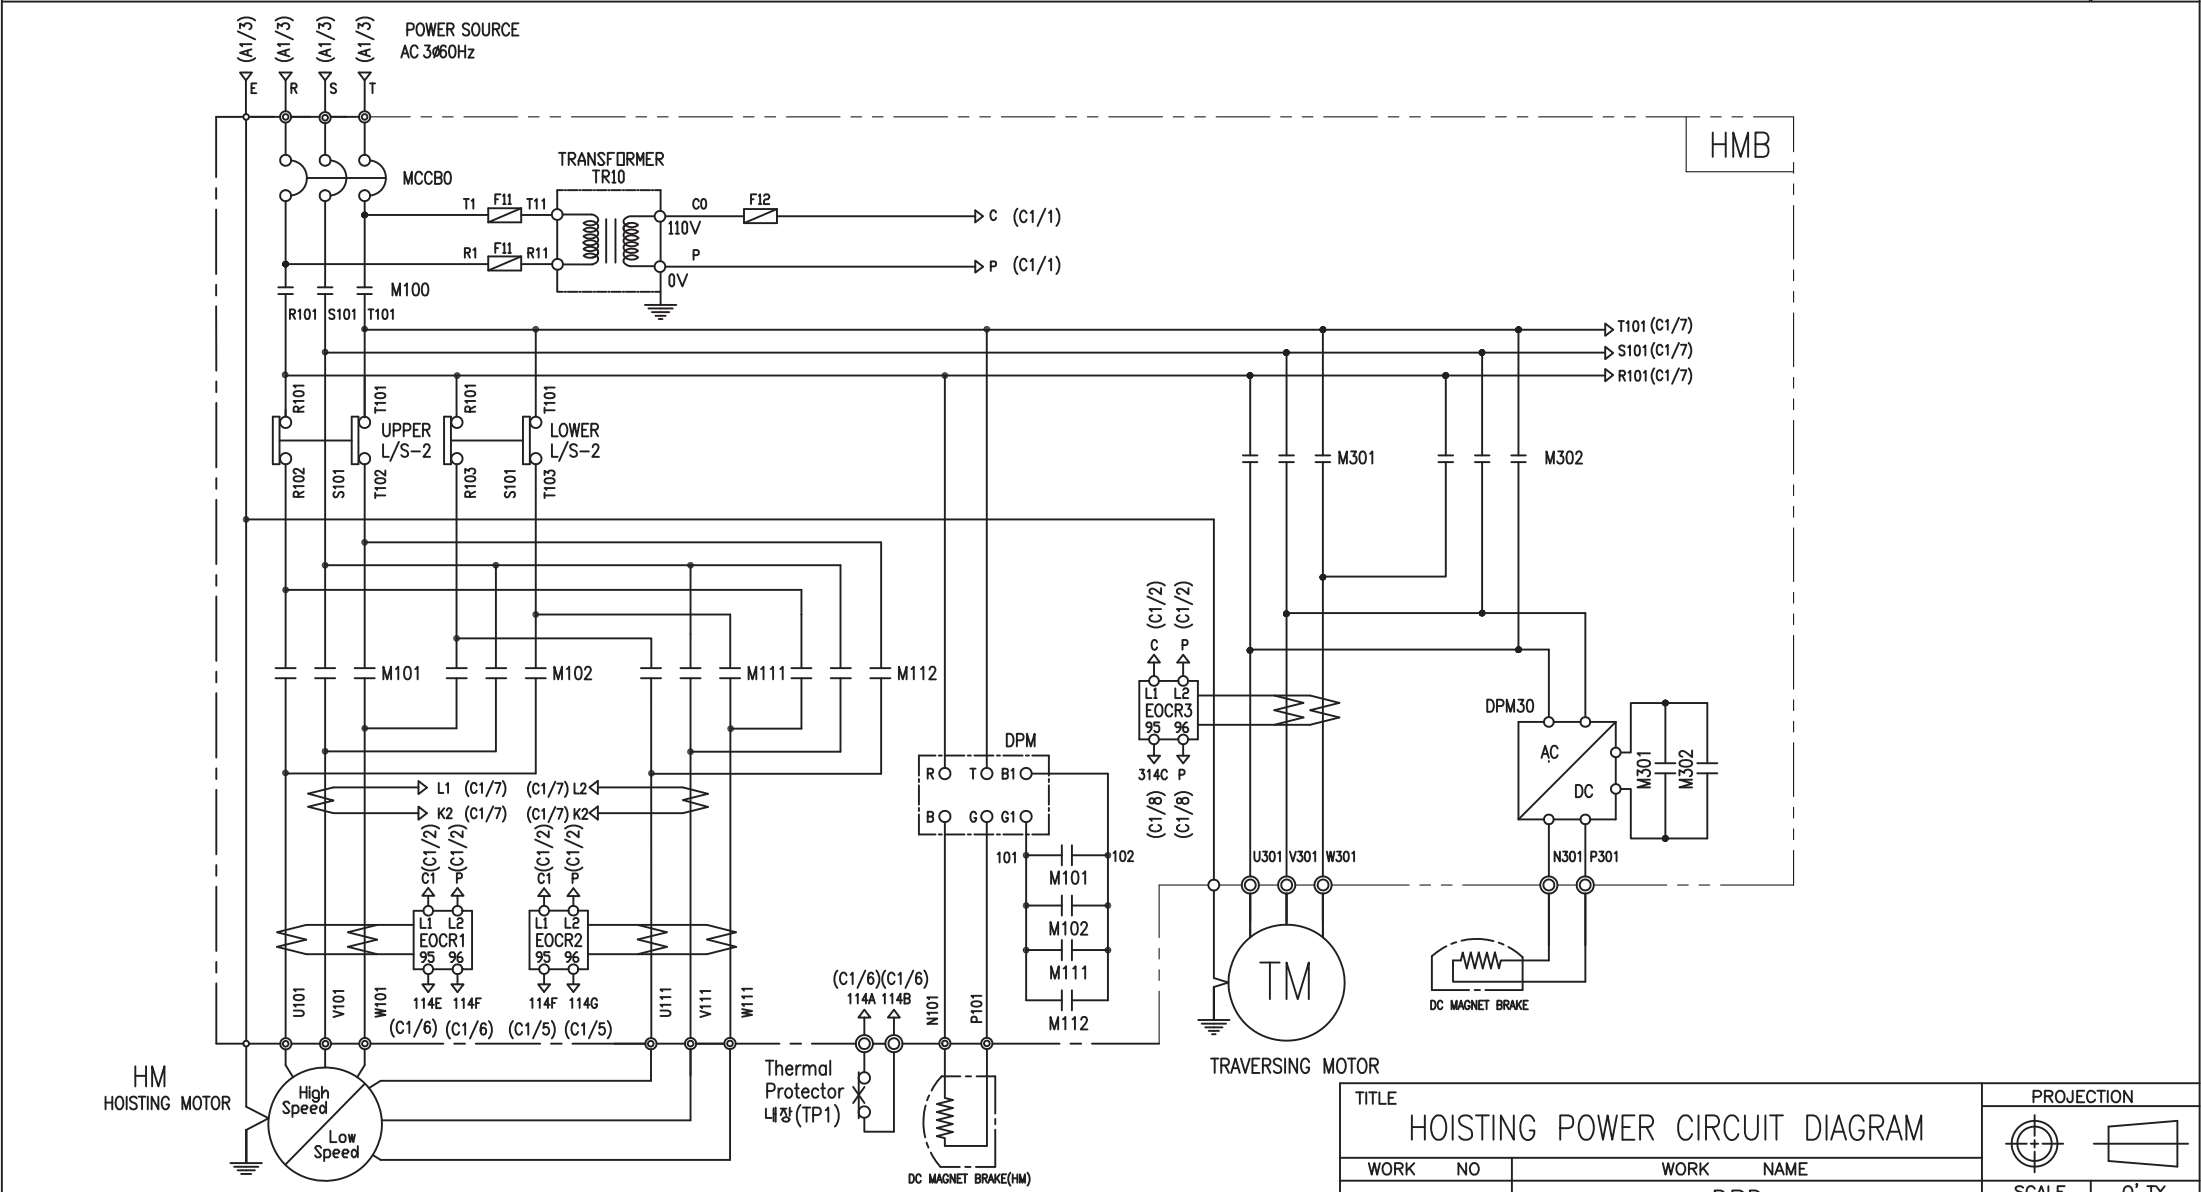


SPECIFICATION	NO FUSE BREAKER		MAGNET CONTACTOR		TRANSFORMER	SILICON RECTIFIER				과전류계전기		FUSE		HOISTING MOTOR	TRAVERSING MOTOR	602	DBD				SCALE	Q' TY	
SYMBOLS	MCCB0		M100	M101,M102 M111, M112	M301,M302	TR10	DPM, DPM30				EOCR1 EOCR2	EOCR3	F11	F12	HM		TM	220V, 440V, 460V, 480V					
DESCRIPTION	220V	40A	DMC22	DMC32	DMC12	60 VA	AC220V	AC440V	AC460V	AC480V	SS-30	SS-06	1A	2A	4.4Kw x 2P / 2.2Kw x 6P	0.75Kw * 4P 0.5Kw * 6P	DRAWN	CHECKED	REVIEWED	APPROVED	MODEL		
	440V	30A															LEE.G.H				CODE NO		CODE_NO
	460V	30A																					
	480V	30A																					
MAKER	LS		DONGA		YOUNG DONG	LK				SAMWHA		-		LK	LK	L K HOIST CO., LTD.							

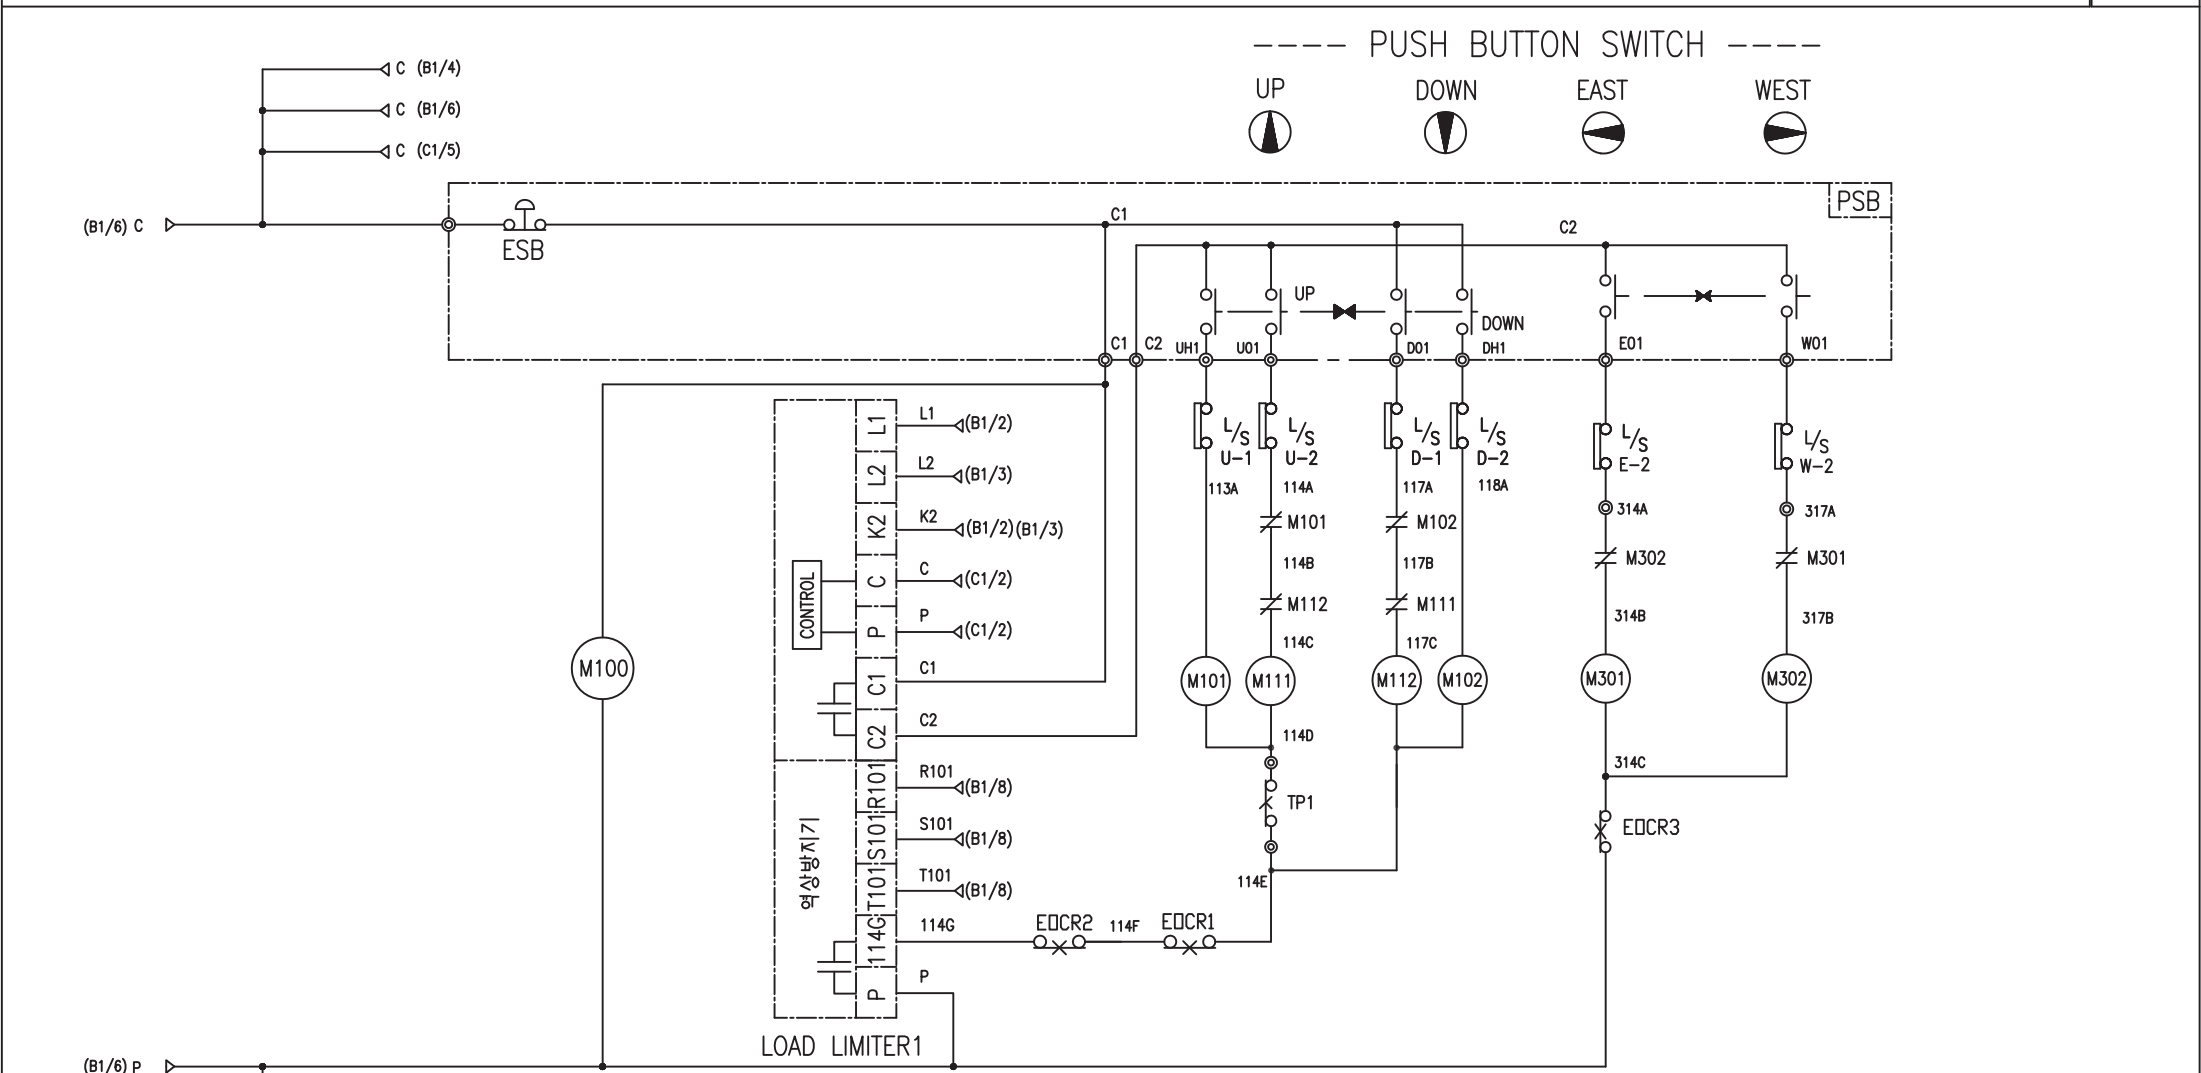


SPECIFICATION	NO FUSE BREAKER		MAGNET CONTACTOR			TRANSFORMER	SILICON RECTIFIER					과전류계전기		FUSE		HOISTING MOTOR	TRAVERSING MOTOR
SYMBOLS	MCCB0		M100	M101,M102 M111, M112	M301,M302	TR10	DPM, DPM30					EOCR1 EOCR2	EOCR3 EOCR4	F11	F12	HM	TM
DESCRIPTION	220V	40A	DMC22	DMC32	DMC12	60 VA	AC220V	AC380V	AC440V	AC460V	AC480V	SS-30	SS-06	1A	2A	4.4Kw x 2P / 2.2Kw x 6P	0.75Kw * 4P / 0.25Kw * 12P
	380V	30A															
	440V	30A															
	460V	30A															
	480V	30A															
MAKER	LS		DONGA			YOUNG DONG	LK					SAMWHA		—		LK	LK

LK L K HOIST CO., LTD.

	ADDRESS NO.
	C2

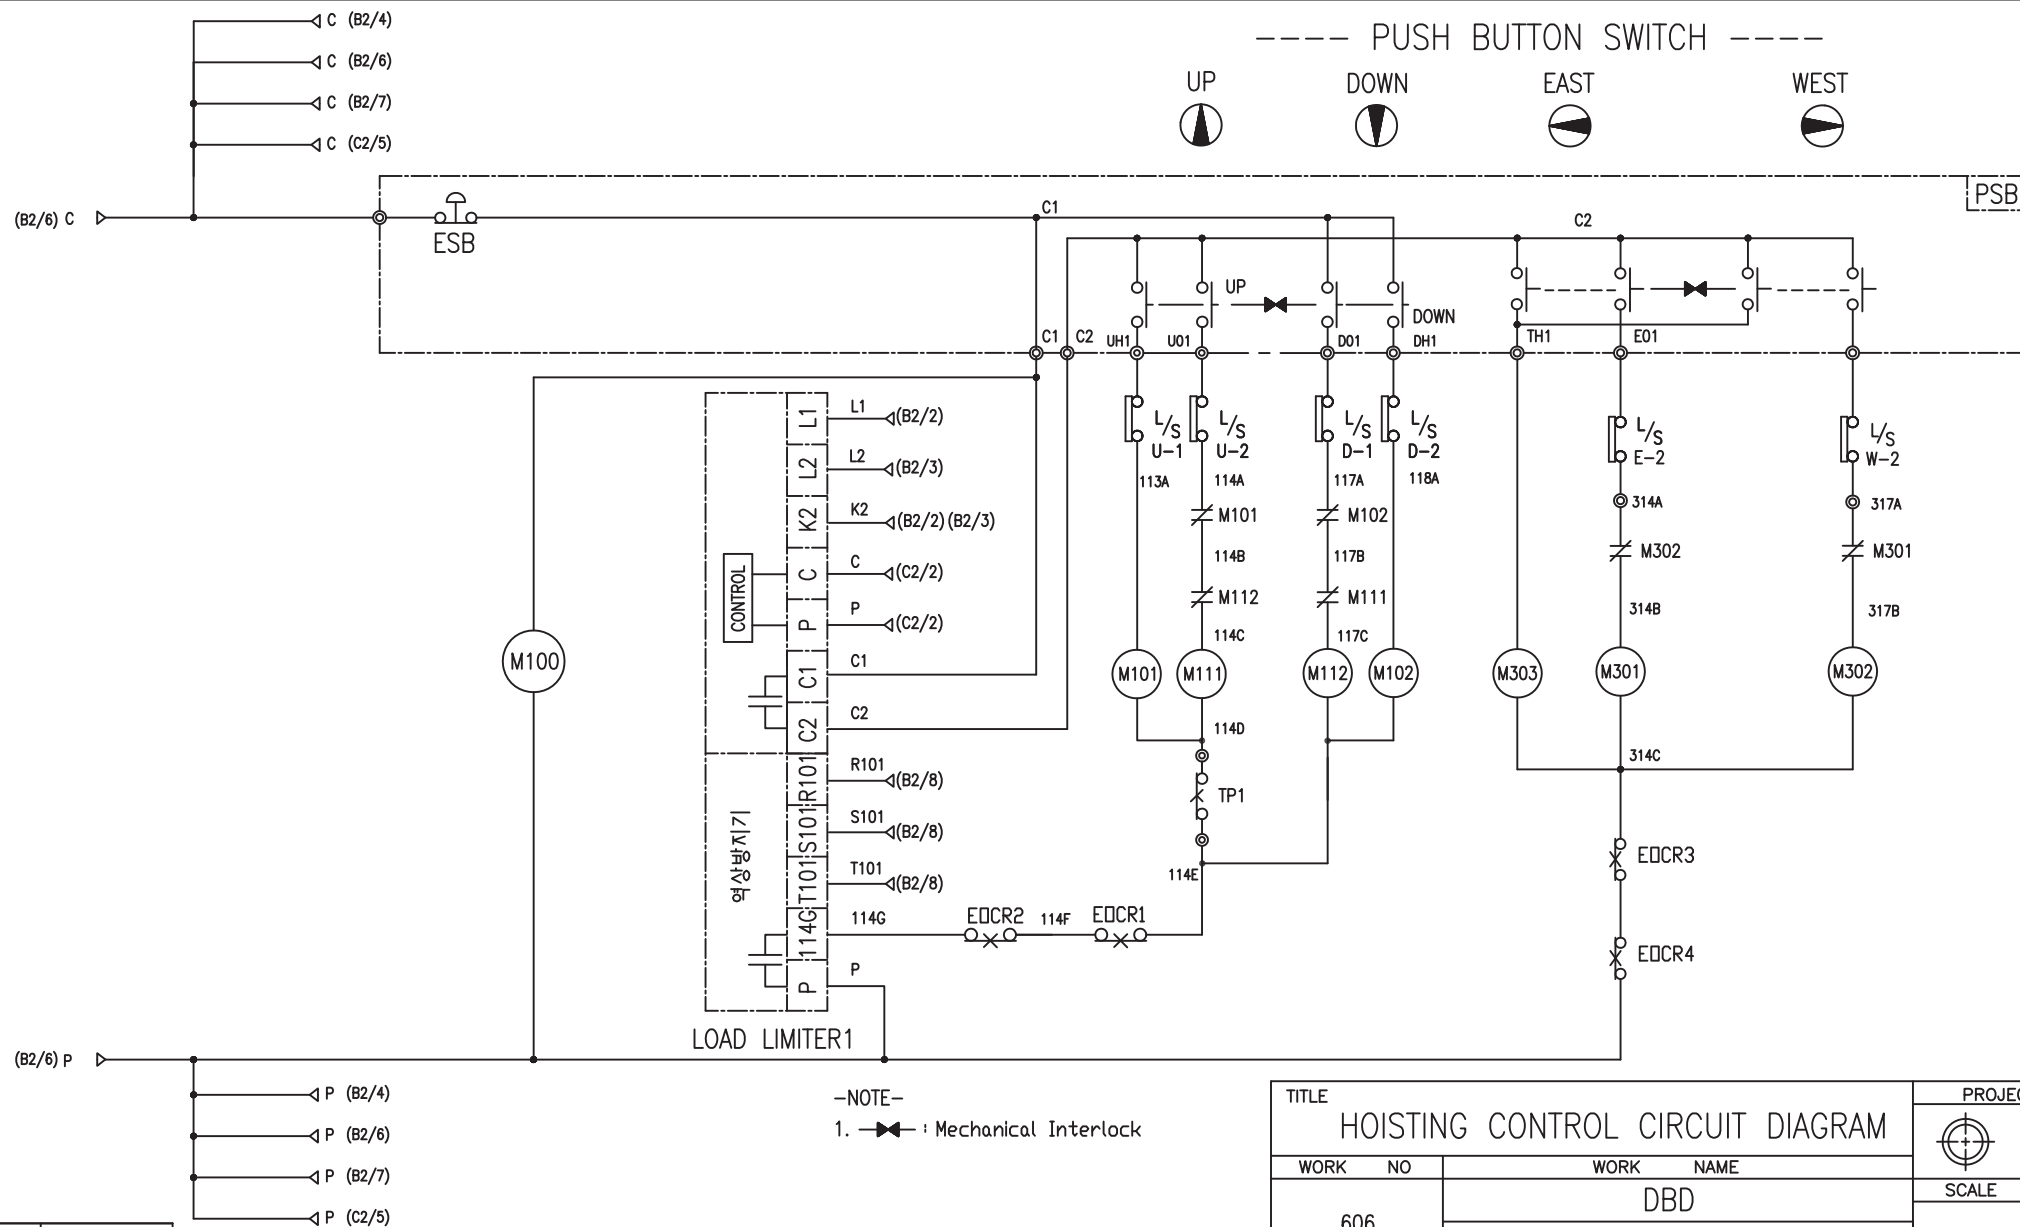

SPECIFICATION	LOAD LIMITER
SYMBOLS	LKDL601
DESCRIPTION	1A – 50A
MAKER	LK

TITLE					PROJECTION	
HOISTING CONTROL CIRCUIT DIAGRAM						
WORK	NO	WORK			NAME	
606		DBD			SCALE	Q' TY
		220V, 380V, 440V, 460V, 480V				
DRAWN	CHECKED	REVIEWED	APPROVED	MODEL		
LEE.G.H				CODE	NO	CODE_NO
2010.08.06						
 L K HOIST CO., LTD.						

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	HOISTING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	4.4/2.2 - 2/6 - 44	
4. RATED POWER	4.4/2.2 KW × 2/6 P	
5. RATED VOLTAGE AND FREQUENCY	440 V 60HZ	
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	30 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	80℃	
11. FULL LOAD SPEED	3440/1140 RPM	
12. FULL LOAD CURRENT	11.2/5.6 A	
13. STARTING CURRENT AT RATED VOLTAGE	54.9/28.6 A	
14. MINIMUM STARTING VOLTAGE	396 V	
15. EFFICIENCY AT 100% RATED LOAD	73/73 %	
16. POWER FACTOR AT 100% RATED LOAD	71/71 %	
17. STARTING TORQUE	243 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6205DD OPL : 6008ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.75 - 4 - 44	
4. RATED POWER	0.75 KW × 4 P	
5. RATED VOLTAGE AND FREQUENCY	440 V 60HZ	
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1710 RPM	
12. FULL LOAD CURRENT	2.4 A	
13. STARTING CURRENT AT RATED VOLTAGE	13.2 A	
14. MINIMUM STARTING VOLTAGE	396 V	
15. EFFICIENCY AT 100% RATED LOAD	65 %	
16. POWER FACTOR AT 100% RATED LOAD	63 %	
17. STARTING TORQUE	249 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.5 - 6 - 44	
4. RATED POWER	0.5 KW × 6 P	
5. RATED VOLTAGE AND FREQUENCY	440 V	60HZ
6. ROTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1140 RPM	
12. FULL LOAD CURRENT	1.6 A	
13. STARTING CURRENT AT RATED VOLTAGE	8.8 A	
14. MINIMUM STARTING VOLTAGE	396 V	
15. EFFICIENCY AT 100% RATED LOAD	65 %	
16. POWER FACTOR AT 100% RATED LOAD	63 %	
17. STARTING TORQUE	250 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPERATURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.75/0.25 - 4/12 - 44	
4. RATED POWER	0.75/0.25 KW × 4/12 P	
5. RATED VOLTAGE AND FREQUENCY	440 V	60HZ
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1710 / 550 RPM	
12. FULL LOAD CURRENT	2.4 / 1.5 A	
13. STARTING CURRENT AT RATED VOLTAGE	13.2 / 8.25 A	
14. MINIMUM STARTING VOLTAGE	396 V	
15. EFFICIENCY AT 100% RATED LOAD	65 / 48 %	
16. POWER FACTOR AT 100% RATED LOAD	63 / 46 %	
17. STARTING TORQUE	250 / 243 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	